


Professional Flash Unit

- ▶ Dual mode – the flash is compatible with **Canon** and **Nikon** cameras
- ▶ **Guide number 56** (ISO 100, 180 mm)
- ▶ High speed synchronisation up to 1/8.000 sec.
- ▶ TTL Flash mode
- ▶ Manual mode
- ▶ Master/Slave mode
- ▶ FEB (flash bracketing)
- ▶ Strobe flash mode
- ▶ Rear-curtain synchronisation

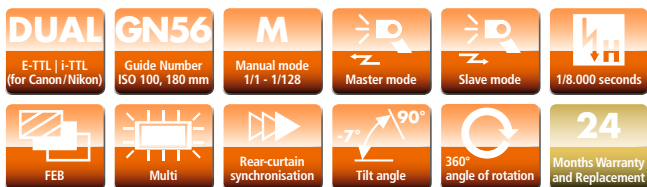

Scope of Delivery

Rollei Flash Unit 56, Protective bag, Micro base, Soft box, USB cable and User manual

Technical Features

Guide Number	56 (ISO 100, 180mm)
Motorised Zoom	18 – 180 mm; manual / automatic zoom
TTL Flash Mode	TTL, M, FEB, Slave, S1, S2, Multi
Wireless Trigger	Light pulse, induction flash light
Wireless Cited Flash Distance	Indoor up to 30 meters Outdoor up to 15 meters
Swivel Reflector	Up and down whirl angle: -7° up to +90° Left and right whirl angle: 0° up to +180°
Slave Group and Unit	4 Slave communication channels (1, 2, 3, 4) 3 Slave unit group (A,B,C)
Color Temperature	5500 K
Flash Duration	1/200 seconds ~ 1/20,000 seconds
High Speed Synchronisation	Up to 1/8,000 seconds
Flash Control	1/128 – 1/1 step length is 0.3 EV, total 22 fine-tuning gear
Peripheral Interface	Hot shoe, PC sync, USB (for firmware updates only)
Recycle Time	2.9 seconds
Power	4x AA batteries or 4x AA Ni-MH batteries (any batteries are not included)
Lighting Time	100 ~ 1500 times
Additional Function	PC synchronous, sleep mode, over temperature protection
Dimensions Weight	WxHxD: 75 x 200 x 57 mm 375 g (without any batteries)

Subject to technical changes

