


Professional Flash Unit

- ▶ Integrated 2.4 GHz receiver
- ▶ Dual mode – the flash is compatible with Canon and Nikon cameras
- ▶ Guide number 58 (ISO 100, 180 mm)
- ▶ High speed synchronisation up to 1/8.000 seconds
- ▶ TTL Flash mode
- ▶ Manual mode
- ▶ Master/Slave mode
- ▶ FEB (flash bracketing)
- ▶ Strobe flash mode
- ▶ Rear-curtain synchronisation
- ▶ Permanent LED light for checking shadows as well as fill light
- ▶ Rechargeable lithium ion battery included

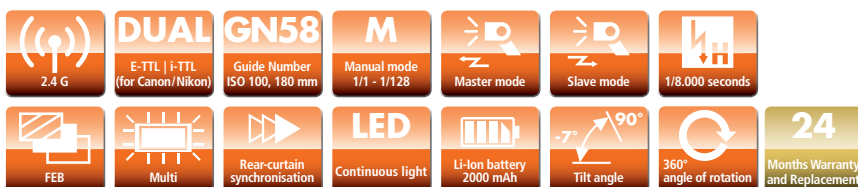

Scope of Delivery

Rollei Flash Unit 58F for Canon / Nikon, Rechargeable Lithium Ion Battery, Protective Bag, Micro Base, Soft Box, USB Cable and User Manual

Technical Features

Guide Number	58 (ISO 100, 180 mm)
Motorised Zoom	18 - 180 mm, manual / automatic zoom
TTL Flash Mode	TTL, M, FEB, 2.4G Master, 2.4G Slave, S1, S2, Multi
Wireless Trigger Distance	Light pulse, induction flash light
WL Transmission Range	Indoor up to 30 meters Outdoor up to 50 meters
WL Transmission range 2.4 GHz	Up to 50 meters
Swivel Reflector	Tilt angle : -7° up to +90° Rotation angle left / right: 0° up to +180°
Slave Group and Unit 2.4 G	16 Slave communication channels (1-16) 3 Slave unit groups (A, B, C)
Slave Group and Unit Infrared	4 Slave communication channels (1-4) 3 slave unit groups (A,B,C)
Color Temperature Flash	5500K
LED Colour Temperature	5500 ± 200 k colour (white)
LED Power	3W
Flash Duration	1/200 seconds – 1/20,000 seconds
High Speed Synchronisation	Up to 1/8,000 seconds
Manual Flash Control	1/128 - 1/1 step 0.3 EV, a total of 22 grade fine-tune gear
Peripheral Interface	Hot shoe, USB (for firmware updates only)
Recycle Time	2.3 seconds
Power	11.1 V lithiumion battery
Lighting Time	100 ~ 1500 times (rechargeable battery)
Additional Functions	Sleep mode, overheating protection
Size Weight	BxHxT: 75 x 200 x 60 mm 437 g (without rechargeable battery)

Subject to technical changes. Canon and Nikon are registered trademarks, Canon and Nikon products are trademarks or registered trademarks of Canon and Nikon.