



PRODUCT INSTRUCTION

Smartphone/Tablet/DSLR Teleprompter

Global patent design Support wide angle lens



Contents


- Packing list
- Structure
- Application
- APP installation
- Remote controller introduction
- After-Service
- Warranty card

Packing list

Packing list



Teleprompter



Smartphone clamp



Smartphone/Tablet clamp



(49/52/55/58/62/67/72/77mm)

Lens adapter



Remote controller



Hexagon wrench
/Screw



Foam ring





Microfiber cloth



User manual



Structure

Structure

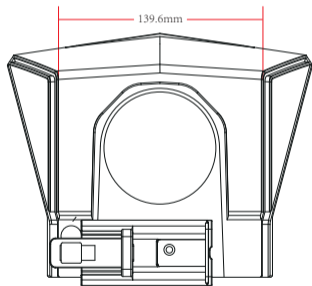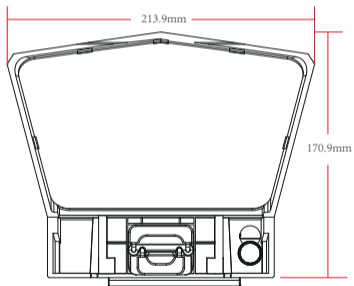

Structure

Structure

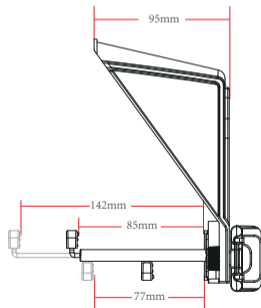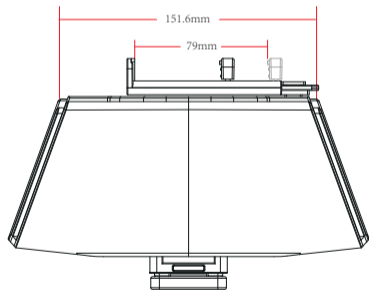

Application

Using the smartphone for live stream Share below two methods for your reference



Application

Installation steps



Take out clamp's components




Install the clamp on the teleprompter



Tighten with the screw cap



Install the teleprompter on the tripod by 1/4" screw hole on the bottom

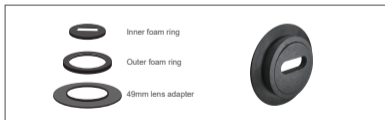

Inner foam ring, outer foam ring, 49mm lens adapter, paste the outer foam ring on the 49mm lens adapter, and then select the inner foam ring that matches the phone lens and embed it in the center of the outer foam ring



Install the assembled 49mm lens adapter onto the teleprompter



Install the phones in front of and rear of the teleprompter

Using DSLR for live stream

Methods 1: Tablet + DSLR




Methods 2: Smartphone + DSLR



Application

Installation steps



Take out the lens adapter



Install the lens adapter on your camera



Install the teleprompter on the camera



Put the teleprompter's smartphone on the teleprompter



Install the whole teleprompter on the tripod



Adjust the focus of lens to full screen



APP installation

IOS app download



IOS user search "BESTVIEW."

Audroid app download



Use your scan tool scan the QC Code to download



Remote controller introduction




NOTICE : Due to different brand phone , some smarphone function will be a little different after connected the remote


Remote controller

Remote use instruction

- 1.power on: Keep press  , until the lights on (about 2 seconds) .
- 2.power off: Keep press  , until the lights off (about 5seconds) .

Notice: if power on without connect anything, it will power off after 5 minutes ;
if connected the phone , it will power off after 30 minutes

3.Connect: After power on , LED lights on , auto into compare mode, select BESTVIEW T1 toconnect. after connected, LED lights off. Next time it will connect automaticlly.If you want connect new device. on power off mode, keep press  longer than 8seconds , lighs flicker, then into the compare mode.



Conditions of Warranty Service

- 1.Free service for one year from the day of purchase if the issue is caused by manufacturing errors.
2. The components and maintenance service fee will be charged if the period is expired.

Free service will not be provided in the following situations
(* Even if the product is still within the warranty period)

- 1.Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- 2.Damage caused by a natural disaster, abnormal voltage, and environmental factors, etc.

Warranty Card

User Information

Name:

Phone:

Add:

Sales Information

Sale date:

Distributor name:

Distributor tel:

Repair log

Repair date:

Repair name:

Issue:

Result:

Repaired

Not repaired

Return

