


**Professional studio flash unit with rechargeable battery –
Ideal for outdoor shootings**

- ▶ Can be used in a studio or in outdoor use
- ▶ Battery-operated studio flash for high mobility
- ▶ Easy to transport – only 2300 g
- ▶ Low recycle time – below 2 seconds but with extreme high flash power up to 400 watt-seconds (Ws)
- ▶ TTL and manual mode
- ▶ High Speed Sync up to 1/8000 second
- ▶ Freeze mode up to 1/19000 second
- ▶ Synchronization on the front and rear curtain
- ▶ Control via radio transmitter, radio transmitter supported by App (can be downloaded for free)
- ▶ Bowens connection for high compatibility with accessories

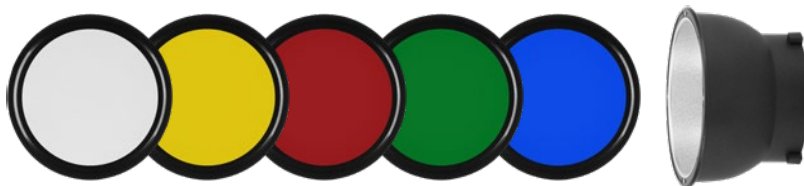

Technical Data	
Flash Power	400 WS
Flash Power Range	9 stops (in 0.1F or 1.0F increments)
Guide Number	66 (with ISO 100)
Modeling Light	15 W LED
Recycle Time	Approx. 1.7 seconds
Flash Duration	Normal: 1/800s – 1/8000s Freeze: 1/800s – 1/19000s
Lighting Time	Up to 500 (if battery is fully charged)
Operation modes	TTL, M (manual), Easy Cap, Delay
Flash modes	Normal High Speed Sync Freeze
Channels Groups	0 – 15 A, B, C, D, E, F, G, H, I, J
Radio Range	Up to 300 meters (built-in radio receiver)
Infrared Sensor	Integrated (IR slave function)
Connections	Sync (3,5 mm) USB (for firmware updates)
Display	Multifunctional LCD (7.2 cm / 2.8")
Power Supply	Exchangeable and rechargeable lithium polymer battery (14.8 V / 4.4 Ah)
Dimension Weight	28.5x 11.5 x 12.5 cm 2.300 kg / 1.689 kg (with/without battery)
Scope of Delivery	Studio flash light incl. flash tube, protective glass, battery, charging cable, reflector, 5 magnetic colour gels, case, manual

Subject to technical changes.